

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 September 2001 (20.09.2001)

PCT

(10) International Publication Number  
**WO 01/67972 A3**

(51) International Patent Classification<sup>7</sup>: **A61B 17/70**

(21) International Application Number: **PCT/US01/04852**

(22) International Filing Date: 15 February 2001 (15.02.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/526.104 15 March 2000 (15.03.2000) US

(71) Applicant (for all designated States except US): **SDGI HOLDINGS, INC.** [US/US]; Suite 508, 300 Delaware Avenue, Wilmington, DE 19801 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MORRISON, Matthew, M.** [US/US]; 8774 Lybrook Cove, Cordova, TN 38018 (US).

(74) Agents: **JONES, Kurt, N. et al.**; Woodward, Emhardt, Naughton, Moriarty & McNett, Bank One Center/Tower, Suite 3700, 111 Monument Circle, Indianapolis, IN 46204 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: **SPINAL IMPLANT CONNECTION ASSEMBLY**

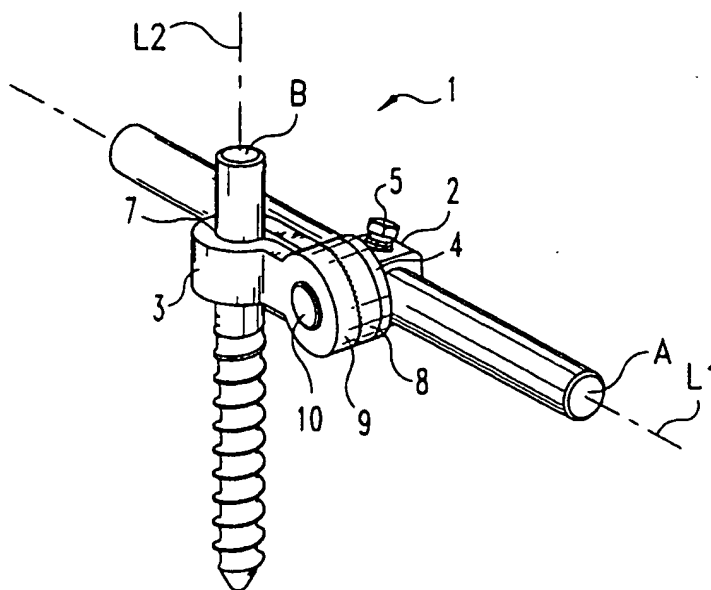

(57) Abstract: A variable angle connection (1) between a spinal rod (A) and a vertebral anchor (B) with a clevis (3) to attach to the vertebral anchor, permitting the vertebral anchor to be longitudinally offset from the connecting point on the rod. The connection assembly has a bolt (2) with a stop (10) disposed near one end of the bolt and an aperture (6) for receiving a portion of the spinal implant rod at the other end. The assembly also has a clevis. The clevis defines a bore (7) to hold a portion of the vertebral anchor and the ears (8, 9) of the clevis have holes through which the bolt is located with the ears positioned between the stop and aperture of the bolt. The assembly also has a rod interface washer (4) positioned over a portion of the bolt, between the aperture of the bolt and the inside ear of the clevis. The rod interface washer is partly movable between the aperture of the bolt and the clevis, but the washer is

fixed against rotating in relation to the bolt. Finally, the assembly also includes a screw (15) that threads into the side of the bolt and continues into the aperture of the bolt. The screw is used to push the rod toward the vertebral anchor so that the inside and outside ears of said clevis are pressed together and the clevis is tightened around the vertebral anchor.

WO 01/67972 A3



(88) Date of publication of the international search report:  
3 January 2002

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 01/04852

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61B17/70

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 786 235 A (W.HERMANN) 30 July 1997 (1997-07-30)	1-3,6, 8-11,14, 16-18, 21, 23-27, 29,30
Y	column 3, line 40 - line 52	4,5,7, 12,13, 15,19, 20,22,28
	column 4, line 8 - line 29 figures 1-8	
Y	FR 2 692 471 A (P.ROUSSOULY) 24 December 1993 (1993-12-24) figures 2,5	4,5,12, 13,19,20
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*G\* document member of the same patent family

Date of the actual completion of the international search

6 September 2001

Date of mailing of the international search report

17/09/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Nice, P

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/04852

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>US 5 947 967 A (B.T.BARKER)  7 September 1999 (1999-09-07)  figures 14,16  -----</p>	<p>7,15,22,  28</p>

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/04852

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0786235 A	30-07-1997	AT 191326 T	15-04-2000
		DE 59701383 D	11-05-2000
		EP 0928602 A	14-07-1999
		ES 2145521 T	01-07-2000
FR 2692471 A	24-12-1993	AT 150634 T	15-04-1997
		AU 670097 B	04-07-1996
		AU 4333093 A	24-01-1994
		CA 2137374 A,C	06-01-1994
		DE 69309272 D	30-04-1997
		DE 69309272 T	09-10-1997
		DK 645986 T	13-10-1997
		EP 0645986 A	05-04-1995
		ES 2102655 T	01-08-1997
		WO 9400062 A	06-01-1994
		JP 2560207 B	04-12-1996
		JP 7504593 T	25-05-1995
		US 5810817 A	22-09-1998
US 5947967 A	07-09-1999	NONE	

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 5,885,285  
DATED : March 23, 1999  
INVENTOR(S) : Peter M. Simonson

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:


Title page,

Item [\*], please delete the patent number "5,047,029" and insert -- 5,643,263 -- in its place.

Signed and Sealed this

Twenty-ninth Day of January, 2002

*Attest:*

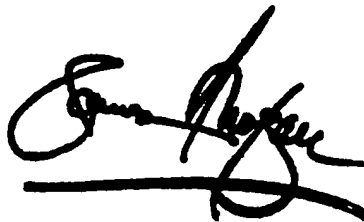A handwritten signature in black ink, appearing to read "James E. Rogan", written over a horizontal line.

*Attesting Officer*

JAMES E. ROGAN  
*Director of the United States Patent and Trademark Office*

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 September 2001 (20.09.2001)


PCT

(10) International Publication Number  
**WO 01/67972 A2**

- (51) International Patent Classification<sup>7</sup>: **A61B 17/70**
- (21) International Application Number: **PCT/US01/04852**
- (22) International Filing Date: 15 February 2001 (15.02.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/526,104 15 March 2000 (15.03.2000) US
- (71) Applicant (for all designated States except US): **SDGI HOLDINGS, INC.** [US/US]; Suite 508, 300 Delaware Avenue, Wilmington, DE 19801 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **MORRISON, Matthew, M.** [US/US]; 8774 Lybrook Cove, Cordova, TN 38018 (US).
- (54) Title: **SPINAL IMPLANT CONNECTION ASSEMBLY**
- (74) Agents: **JONES, Kurt, N. et al.**; Woodard, Emhardt, Naughton, Moriarty & McNett, Bank One Center/Tower, Suite 3700, 111 Monument Circle, Indianapolis, IN 46204 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: **SPINAL IMPLANT CONNECTION ASSEMBLY**

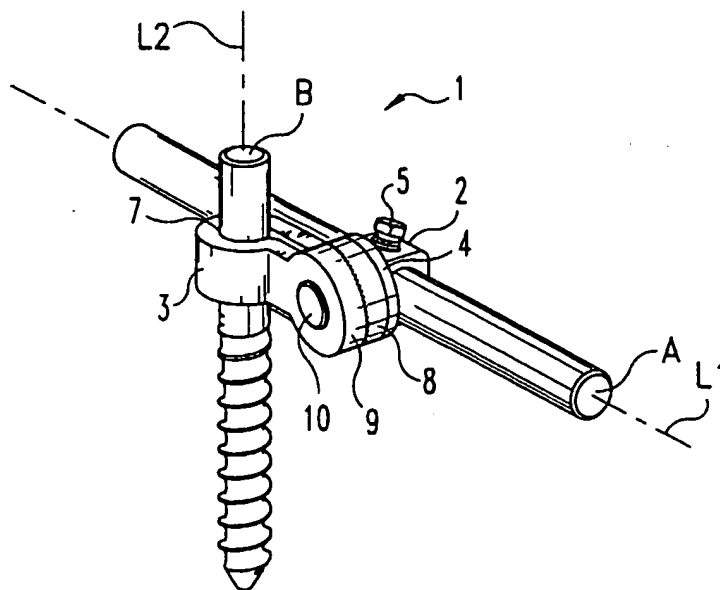

(57) Abstract: A variable angle connection between a spinal rod and a vertebral anchor with a clevis to attach to the vertebral anchor, permitting the vertebral anchor to be longitudinally offset from the connecting point on the rod. The connection assembly has a bolt with a stop disposed near one end of the bolt and an aperture for receiving a portion of the spinal implant rod at the other end. The assembly also has a clevis. The clevis defines a bore to hold a portion of the vertebral anchor and the ears of the clevis have holes through which the bolt is located with the ears positioned between the stop and aperture of the bolt. The assembly also has a rod interface washer positioned over a portion of the bolt, between the aperture of the bolt and the inside ear of the clevis. The rod interface washer is partly movable between the aperture of the bolt and the clevis, but the washer is fixed against rotating in relation to the

bolt. Finally, the assembly also includes a screw that is threads into the side of the bolt and continues into the aperture of the bolt. The screw is used to push the rod toward the vertebral anchor so that the inside and outside ears of said clevis are pressed together and the clevis is tightened the vertebral anchor.

WO 01/67972 A2



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



## SPINAL IMPLANT CONNECTION ASSEMBLY

5 This invention relates to a spinal implant connection between a spinal rod and a vertebral anchor, and more particularly relates to a spinal implant connection with a clevis to attach to the vertebral anchor.

## BACKGROUND

Spinal implant systems provide a rod for supporting the spine and for properly positioning components of the spine for various treatment purposes.

10 Bolts, screws, and hooks are typically secured to the vertebrae for connection to the supporting rod. These vertebral anchors must frequently be positioned at various angles due the anatomical structure of the patient, the physiological problem being treated, and the preference of the physician. It is difficult to provide secure connections between the spinal support rod and these vertebral anchors at

15 all the various angles that are required, especially where there are different distances between the rod and bolts and where these components are located at different heights on the patient.

One solution to this problem is shown in U.S. Patent numbers 5,643,263 and 5,885,285 to Simonson, the disclosures of which are specifically incorporated

20 into this specification by reference. These patents describe a connection between a rod and a vertebral anchor, through which a surgeon may vary the angle between a spinal rod and the anchor to which the rod is attached. The connection is equipped with an interlocking set of washers that allow the surgeon to fix the desired angle between the anchor and the rod. In general, this system requires the surgeon in a

25 typical installation to either sacrifice the capsule of the facet joint that may reside next to the connection, or elevate the connection above the facet joint and thereby raise the profile of the entire spinal implant system at that location. Occasionally, however, the surgeon may not wish to exercise either of these options in a particular surgery. Hence, an improvement over the device shown in these earlier

30 patents would be a connection assembly that simultaneously minimizes the profile of the spinal implant system above the patient's spine without generally requiring the surgeon to sacrifice a facet joint that may reside next to a particular rod-to-vertebral-anchor connection assembly. The following invention is one solution to that need.

## SUMMARY OF THE INVENTION

In one aspect, this invention is a connection assembly between a spinal implant rod and a vertebral anchor. The assembly has a bolt with a stop disposed near one end of the bolt and an aperture for receiving a portion of the spinal  
5 implant rod at the other end. The assembly also has a clevis. The clevis defines a bore to hold a portion of the vertebral anchor and the ears of the clevis have holes through which the bolt is located with the ears positioned between the stop and aperture of the bolt. The assembly also has a rod interface washer positioned over a portion of the bolt, between the aperture of the bolt and the inside ear of the  
10 clevis. The rod interface washer is partly movable between the aperture of the bolt and the clevis, but the washer is fixed against rotating in relation to the bolt. Finally, the assembly also includes a screw that threads into the side of the bolt and continues into the aperture of the bolt. The screw is used to push the rod toward the vertebral anchor so that the inside and outside ears of the clevis are pressed  
15 together and the clevis is tightened around the vertebral anchor.

Optionally, the inside ear of the clevis and the rod interface washer have mating male protrusions and female cavities on their surfaces such that, when pressed together, the protrusions and cavities engage to further prevent rotation of the clevis in relation to the rod interface washer. In this alternative design, the  
20 protrusions and cavities have multiple interlocking orientations so that the rod interface washer and the clevis can be interlocked in a plurality of fixed angles in relation to each other.

An object of this invention is to reduce the physical mass that is typically required to attach a spinal rod to a vertebral anchor.

25 An advantage of this invention is that the clevis allows a vertebral anchor to be placed closer to the spinal rod than prior art designs that also use a single means to allow the surgeon to secure both the anchor and the rod to the connection assembly in one tightening step.

A feature of this invention is that it allows the surgeon the option of  
30 lowering the profile of a spinal attachment system closer to the spine without requiring the surgeon to sacrifice the capsule of a facet joint that may reside next to

the connection assembly. In other words, this invention allows the connection assembly to be placed in a position that is medial to the facet joint.

As used in this specification the term "clevis" is used in its ordinary and accustomed meaning that being—“(1): a fitting for attaching or suspending parts  
5 (as a cable to another structural member of a bridge or a hanger for supporting pipe) that consists usu. of a U-shaped piece of metal with the ends drilled to receive a pin or bolt (2): any of various connections in which one part is fitted between the forked ends of another and fastened by means of a bolt or pin passing through the forked ends.” Webster’s Third New International Dictionary,  
10 Unabridged.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a connection assembly constructed pursuant to this invention.

FIGS. 2 and 2A are end views of a connection assembly constructed pursuant to this invention.

FIGS. 3 and 3A are top views of a connection assembly constructed pursuant to this invention.

FIG. 4 is a top view of a bolt constructed pursuant to this invention.

FIG. 5 is a side view of a bolt constructed pursuant to this invention.

FIG. 6 is an end view of a bolt constructed pursuant to this invention.

FIG. 7 is a cross-sectional view of a bolt constructed pursuant to this invention.

FIGS. 8 & 9 respectfully depict a stop in plan and elevational views constructed pursuant to this invention.

FIG. 10 is a cross-sectional view of clevis constructed pursuant to this invention.

FIG. 11 is an end view of a clevis constructed pursuant to this invention.

FIG. 12 is a side view of a clevis constructed pursuant to this invention.

FIG. 13 is a side view of one alternative embodiment of a clevis constructed pursuant to this invention.

FIG. 14 is a side view of a second alternative embodiment of a clevis constructed pursuant to this invention.

FIGS. 15, 16 & 17 are respectively top, side, and cross-sectional views of a connection assembly constructed pursuant to this invention.

FIGS. 18, 19 & 20 are respectively end, side, and top views of a rod interface washer constructed pursuant to this invention.

## DESCRIPTION OF THE PREFERRED EMBODIMENT

Specific language is used in the following description to publicly disclose the invention and to convey its principles to others. No limits on the breadth of the patent rights based simply on using specific language are intended. Also included  
5 are any alterations and modifications to the description that should normally occur to one of average skill in this technology.

A connection assembly 1 according to the invention is shown in Figs. 1-3. Connection assembly 1 is shown attaching a spinal implant rod "A" with a longitudinal axis L1 to the shaft of a vertebral anchor "B" with the longitudinal  
10 axis L2. Connection assembly 1 includes a bolt 2, a clevis 3, a rod interface washer 4, and a set screw 5. Bolt 2 has an aperture 6 for receiving a rod in a spinal implant system. While a closed aperture is shown, it will nevertheless be understood that an open-sided aperture may also be used to permit top-loading of the connector rod. Set screw 5 is inserted through a threaded opening 15 in bolt 5  
15 and into aperture 6 so as to allow set screw 5 to push against rod A. Clevis 3 has a bore 7 for receiving a vertebral anchor in a spinal implant system. Clevis 3 wraps around the shaft of vertebral anchor B and is simultaneously tightened when set screw 5 is tightened against rod A. It is contemplated that the shaft of B may be roughened and the interior of clevis 3 may be correspondingly roughened to  
20 increase friction between them. As set screw 5 pushes against rod A, rod A pushes against rod interface washer 4. This force pinches the ends 8 and 9 of clevis 3 together between rod interface washer 4 and stop 10, which tightens clevis 3 around vertebral anchor B. In this manner, set screw 5 acts as a compression member to tighten the connection assembly and achieve substantial fixation.

25 Details of bolt 2 are shown in Figs. 4-7. Bolt 2 can be subdivided into bolt head portion 11, bolt shaft portion 12, washer seat portion 13 and washer stop portion 14. Threaded openings 15a & 15b, and aperture 6 reside in bolt head portion 11. Threaded openings 15 a & 15b open into aperture 6 at an oblique angle A4 with respect to longitudinal axis L3 to allow set screw 5 (Figs. 1-3) to force  
30 spinal rod A toward the distal end 16 of aperture 6. Bolt 2 is substantially symmetrical about longitudinal axis L3 such that threaded openings 15a and 15b

are substantially mirror images. Bolt shaft portion 12 is generally cylindrical in shape and is sized to accept the eyes (items 17 and 18, Fig. 10) of clevis 3. Clevis 3 is then held on shaft portion 12 by attaching stop 10 (shown in isolation in Figs. 8 & 9) to the end 19 of shaft portion 12, either by welding or some other suitable means. As an alternative, shaft portion 12 may include threads and stop 10 may be correspondingly threaded to be held in position. In this alternative design, stop 10 may be the compressive member utilized to tighten connection assembly 1.

Bolt 2 also preferably includes washer seat portion 13 and washer stop portion 14. A seat portion 13 that is substantially rectangular in cross-section is currently preferred, but washer seat portion 13 can be of any suitable shape that may interlock with a complementary shape in rod interface washer 4 (Figs. 1-3) to prevent rod interface washer 4 from rotating in relation to bolt 2. As shown, washer stop 14 is generally provided by placing a raised edge in bolt head portion 11. Washer stop 14 prevents rod interface washer 4 from being inadvertently removed from connector assembly 1 during installation.

Referring to Figures 2A and 3A, additional characteristics of the preferred embodiment may be seen by contrasting several of connector assembly 1's relative dimensions. Dimension D1 is the overall width of connection assembly 1, measured from the most medial point 50 of connector assembly 1 to its most lateral point 51. Dimension D2 is the distance from the inside edge of rod A to the outside edge of vertebral anchor B, measured perpendicularly to L1. Dimension D3 is the distance from the inside edge of rod A to the most lateral end 52 of bolt 2, measured perpendicularly to L1. Dimension D4 is the distance from the inside edge of rod A to the inside edge of vertebral anchor B, measured perpendicularly to L1. Dimension D5 is the distance from the outside edge of vertebral anchor B to the most lateral point 51 of connector assembly 1. And dimension D6 is the distance from L2 to L3, measured parallel to L1.

Contrasting several of these dimensions, most notably D3 can be less than D2 in the present invention. In other words the outside edge 52 of bolt 2 does not need to extend beyond the outside edge of vertebral anchor B. Typically, most connectors place the bore to hold a vertebral anchor at the end of a bolt that

typically holds the vertebral anchor to the rod, necessarily leaving a portion of the bolt extending past the vertebral anchor. An example of such a prior art design is shown in U.S. Patent Nos. 5,643,263 and 5,885,285 to Simonson. But here, bolt 2 does not need to extend beyond anchor B, which would allow bolt 2 of connection  
5 1 to be placed in more narrow passageways than connections of prior art designs.

Next it should be noted that the present invention allows dimension D4 to be shortened as the surgeon may desire, reducing the overall width D1 of the connector assembly. In other words and referring also to Figs. 13 & 14, the present design allows D4 to be shortened by placing the bore 7 of clevis 3 in a  
10 position that is closer to rod A. For example, clevis 3 shown in Fig. 14 could conceivably place vertebral anchor B so close to rod A that only the width of clevis 3 around bore 7 would separate vertebral anchor B from rod A.

Finally, the present design also allows vertebral anchor B to be laterally offset a distance D6 from the longitudinal axis L3 of bolt 2, allowing bolt 2 and its  
15 connection to rod A to lie in a different transverse plane on the patient than vertebral anchor B would lie. Most prior art designs such as U.S. Patent Nos. 5,643,263 and 5,885,285 to Simonson place the bore to hold vertebral anchor B in the same transverse plane as the connection to rod A. In other words, vertebral anchor B is usually situated in line with the longitudinal axis of the structure,  
20 usually a bolt, that holds the vertebral anchor B and rod A together. Here, however, the present invention allows bolt 2 to be placed in one transverse plane (in one longitudinal location along rod A) and vertebral anchor B to be placed in another transverse plane (or another longitudinal location along rod A). Thusly situated, bolt 2 is separated from vertebral anchor B by a distance D6, measured  
25 longitudinally along rod A. Moreover, D6 can be larger than D4, readily allowing bolt 2 to be placed in one longitudinal position on the spine and vertebral anchor B to be placed in another position, above or below bolt 2. Located in this fashion, the surgeon can place the connector assembly of the present invention in a location that avoids interfering with the facet joints of the patient's spine.

30 Details of clevis 3 are shown in Figs. 10-12. Clevis 3 includes a bore 7, a proximal ear 8 or end 8 and a distal ear 9 or end 9. Proximal ear 8 has an eye 18

and distal ear 9 has an eye 17. As previously presented, bolt 5 attaches to clevis 3 by placing the shaft portion of bolt 5 through eyes 17 and 18 and then attaching end 10 (Fig. 15). The proximal ear 8 also includes a connection surface 20.

Connection surface 20 preferably includes structure for facilitating the engagement of clevis 3 against rotational movement relative to rod interface washer 4. This engagement structure is preferably a plurality of variable angle ridges 21 that radiate from the rotational center of clevis 3. In other words, the structure is a set of interlocking teeth that can generally be characterized as male protrusions and complementary female cavities.

Referring to Figs. 10, 13 and 14; bore 7 of clevis 3 may assume various orientations in relation to the centerline 22 of clevis 3. Fig. 10 depicts bore 7 offset from centerline 22 toward the stop (not shown) of bolt 2. Optionally, bore 7 can be offset from centerline 22 toward the aperture (not shown) of bolt 2, as shown in Fig. 14, or bore 7 can be placed in the same plane as centerline 22, as shown in Fig. 13. It being understood that the alternative clevis designs may permit even smaller total width of connection assembly by bringing the vertebral anchor closer to the rod.

Details of rod interface washer 4 are shown in Figs. 18-20. Rod interface washer 4 can be any of several suitable shapes, including the circle that is depicted. One surface 23 of the rod interface washer 4 has an engagement surface, which preferably includes an engagement groove 24 that accepts a cylindrical spinal implant rod (such as rod A in Figs. 1-3). Engagement groove 24 preferably runs across the entire face of surface 23. Rod interface washer 4 also has a central opening 25 that corresponds to the cross-sectional shape of previously presented washer seat portion 13 in bolt 2. In the currently preferred embodiment, both washer seat portion 13 and opening 25 are substantially square. Although, this shape could vary from many possible shapes that would similarly prevent rod interface washer from rotating in respect to bolt 2. To assist in this regard, it is also preferable that rod interface washer have a guide groove 26 to accept bolt head portion 11 of bolt 2 to further lock bolt 2 and rod interface washer 4 together. In this regard it should be noted that guide groove 26 and engagement groove 24



are preferably placed in such a manner that orients aperture 6 substantially parallel to groove 24. This placement helps insure that a spinal rod (item A in Figs. 1-3) will be held in the connector assembly in a direction that is substantially perpendicular to bolt 2, and in turn, also substantially perpendicular to set screw 5.

5 Rod interface washer 4 also includes connection surface 27. Connection surface 27 preferably includes structure for facilitating the engagement of rod interface washer against rotational movement relative to clevis 3. This engagement structure is preferably a plurality of variable angle ridges 28 that radiate from the rotational center of rod engagement washer 4 as that previously  
10 described on clevis 3. Variable angle ridges 28 are sized to mate with the similar variable angle ridges 21 on clevis 3. Referring to Figs. 11 and 18, both sets of ridges consist of alternating male protrusions and female cavities. Hence, once placed together, these interlocking ridges prevent rod engagement washer 4 from rotating in respect to clevis 3. And although radiating ridges are shown to facilitate  
15 the fixation of these two parts, it is also contemplated that other structures could serve this function. For example, it is also contemplated that one could use any number of interlocking male and female structures such as rounded bumps or knurling and mating cavities. The locking engagement of connection surface 20 with connection surface 27 may occur at any of a plurality of angles. More specifically, the angle between longitudinal axis L1 of the vertebral anchor and longitudinal axis L2 of the rod may be adjusted to meet the requirements of the patient's anatomy.

The rotatable connection assembly of this invention is again depicted in Figs. 15-17, less set screw 5, which has been removed for clarity along with rod A  
25 and vertebral anchor B. The device is used by placing a spinal rod through aperture 6 in bolt 2. The post of a vertebral anchor is then located in bore 7 of clevis 3 and the variable angle ridges 20 on the rod interface washer are interlocked with the variable angle ridges 28 on clevis 3 as the surgeon desires. Thusly situated, the assembly is then tightened by threading set screw 5 into either  
30 of the threaded openings 15 of bolt 2. Upon entering aperture 6, set screw 5 contacts the spinal rod and forces the spinal rod toward interface washer 4. The

spinal rod then contacts rod interface washer 4, and preferably engages groove 24.

As one continues turning set screw 5, rod interface washer presses ears 8 and 9 of clevis 3 against stop 10. This action forces ears 8 and 9 together, which in turn, tighten clevis 3 around the post of the vertebral anchor. The variable angle

5 surfaces, item 20 on clevis 3 and item 27 on rod interface washer 4, engage each other and prevent rod interface washer 4 from rotating in relation to clevis 3, which further locks clevis 3 in relation to bolt 2 because rod interface washer 4 cannot rotate in relation to bolt 2. Adjustments can be made by loosening set screw 5 then re-tightening the set screw when the preferred position has been located.

10 While the invention has been illustrated and described in detail, this is to be considered as illustrative and not restrictive of the patent rights. The reader should understand that only the preferred embodiments have been presented and all changes and modifications that come within the spirit of the invention are included if the following claims or the legal equivalent of these claims describes them.

I claim:

1. A connection assembly between a spinal implant rod and a vertebral anchor, the assembly comprising:
  - 5 a bolt, said bolt having a stop disposed near one end of the bolt and an aperture for receiving a portion of the spinal implant rod at the opposite end of the bolt;
  - a clevis, said clevis defining a bore to hold a portion of the vertebral anchor, said clevis having inside and outside overlapping ears, said ears having substantially aligned channels therein, said bolt
  - 10 positioned within the substantially aligned channels with the ears of said clevis positioned between the stop and the aperture of said bolt;
  - a rod interface washer positioned over a portion of the bolt, between the aperture of said bolt and the inside ear of said clevis; said rod interface washer being movable in part between the aperture of said
  - 15 bolt and said clevis, said rod interface washer being fixed against rotation relative to said bolt; and
  - a compression member threadably engaged to said bolt to urge the rod toward the vertebral anchor, whereby the inside and outside ears of said clevis will be pressed together, tightening said clevis around a
  - 20 portion of the vertebral anchor; and whereby the inside ear of said clevis and said rod interface washer will be pressed together between the rod and the vertebral anchor.
2. The connection assembly of claim 1, wherein said bolt further includes a washer seat and a washer stop, the washer stop preventing removal of the rod
- 25 interface washer from the connection assembly.
3. The connection assembly of claim 1, wherein the rod interface washer has a groove therein that is sized to accept a portion of a spinal implant rod.
4. The connection assembly of claim 1, wherein said clevis has a centerline and the bore of said clevis is laterally offset from the centerline toward the aperture
- 30 in said bolt.

5. The connection assembly of claim 1, wherein said clevis has a centerline and the bore of said clevis is laterally offset from the centerline toward the stop in said bolt.
6. The connection assembly of claim 1, wherein said clevis has a centerline and the bore of said clevis resides in the same plane as the centerline.
7. The connection assembly of claim 1, wherein said compression member is a set screw threadably engaged into the aperture of said bolt.
8. The connection assembly of claim 1, wherein said channels in said clevis are holes.
9. A connection assembly between a spinal implant rod and a vertebral anchor, the assembly comprising:
- a bolt, said bolt having a stop disposed near one end of the bolt and an aperture for receiving a portion of the spinal implant rod near the opposite end of the bolt;
  - a clevis, said clevis defining a bore to hold a portion of the vertebral anchor, said clevis having inside and outside overlapping ears, said ears having substantially aligned holes therein, said bolt positioned within the substantially aligned holes with the ears of said clevis positioned between the stop and aperture of said bolt;
  - a rod interface washer positioned over a portion of the bolt, between the aperture of said bolt and the inside ear of said clevis; said rod interface washer being movable in part between the aperture of said bolt and said clevis, said rod interface washer being fixed against rotation relative to said bolt;
  - a compression member threadably engaged to said bolt to urge the rod toward the vertebral anchor, whereby the inside ear of said clevis and said rod interface washer will be pressed together between the rod and the vertebral anchor;
- the inside ear of said clevis and said rod interface washer having mating male protrusions and female cavities on their surface such that, when pressed together, the protrusions and cavities facilitate the

engagement of said rod interface washer to the inside ear of said clevis, preventing rotation of said clevis relative to said rod interface washer and said bolt.

10. The connection assembly of claim 9, wherein the said bolt further includes  
5 a washer seat and a washer stop, the washer stop preventing removal of the rod interface washer from the connection assembly.
11. The connection assembly of claim 9, wherein the rod interface washer has a groove therein that is sized to accept a portion of a spinal implant rod.
12. The connection assembly of claim 9, wherein said clevis has a centerline  
10 and the bore of said clevis is laterally offset from the centerline toward the aperture in said bolt.
13. The connection assembly of claim 9, wherein said clevis has a centerline and the bore of said clevis is laterally offset from the centerline toward the stop in said bolt.
14. The connection assembly of claim 9, wherein said clevis has a centerline  
15 and the bore of said clevis resides in the same plane as the centerline.
15. The connection assembly of claim 9, wherein said compression member is a set screw threadably engaged into the aperture of said bolt.
16. A connection assembly between a spinal implant rod and a vertebral  
20 anchor, the assembly comprising:
- a bolt, said bolt having a stop disposed near one end of the bolt and an aperture for receiving a portion of the spinal implant rod at the other end of the bolt;
  - a clevis, said clevis defining a bore to hold a portion of the vertebral  
25 anchor, said clevis having inside and outside overlapping ears, said ears having substantially aligned holes therein, said bolt positioned within the substantially aligned holes with the ears of said clevis positioned between the stop and aperture of said bolt;
  - a rod interface washer positioned over a portion of the bolt, between the  
30 aperture of said bolt and the inside ear of said clevis; said rod interface washer being movable in part between the aperture of said

bolt and said clevis, said rod interface washer being fixed against rotation relative to said bolt;

a compression member threadably engaged to said bolt to urge the rod toward the vertebral anchor, whereby the inside and outside ears of said clevis will be pressed together, tightening said clevis around a portion of the vertebral anchor; and whereby the inside ear of said clevis and said rod interface washer will be pressed together between the rod and the vertebral anchor;

the inside ear of said clevis and said rod interface washer having mating male protrusions and female cavities on their surface such that, when pressed together, the protrusions and cavities facilitate the engagement of said rod interface washer to the inside ear of said clevis, preventing rotation of said clevis relative to said rod interface washer and said bolt, the protrusions and cavities having multiple interlocking orientations such that said rod interface washer and said clevis can be engaged in a plurality of fixed angles of rotation in relation to each other.

17. The connection assembly of claim 16, wherein the said bolt further includes a washer seat and a washer stop, the washer stop preventing removal of the rod interface washer from the connection assembly.

18. The connection assembly of claim 16, wherein the rod interface washer has a groove therein that is sized to accept a portion of a spinal implant rod.

19. The connection assembly of claim 16, wherein said clevis has a centerline and the bore of said clevis is laterally offset from the centerline toward the aperture in said bolt.


20. The connection assembly of claim 16, wherein said clevis has a centerline and the bore of said clevis is laterally offset from the centerline toward the stop in said bolt.

21. The connection assembly of claim 16, wherein said clevis has a centerline and the bore of said clevis resides in the same plane as the centerline.


22. The connection assembly of claim 16, wherein said compression member is a set screw threadably engaged into the aperture of said bolt.
23. An apparatus for maintaining vertebra in a desired relationship, comprising:  
a rod having a first longitudinal axis extending substantially along the  
5 spine;  
a vertebral anchor having a second longitudinal axis generally  
perpendicular to the longitudinal axis of said rod;  
a connection assembly, said connection assembly including a bolt and a  
clevis, said bolt having a first channel for receiving said rod and a  
10 portion with a third longitudinal axis, said clevis joined to said bolt,  
said clevis having a second channel for receiving said vertebral  
anchor, said second channel offset from said third longitudinal axis.
24. The apparatus of claim 23, wherein said rod is spaced from said vertebral anchor by a first distance that is perpendicular to the first longitudinal axis and the  
15 second longitudinal axis is spaced from the third longitudinal axis by a second distance, said second distance greater than said first distance.
25. The apparatus of claim 23, wherein said clevis may be fixedly connected in a plurality of positions about said third longitudinal axis.
26. The apparatus of claim 23, wherein said clevis is one piece.
- 20 27. The apparatus of claim 23, wherein said connection assembly includes a compression member to tighten said connection assembly and thereby fix the relative position of said rod to said vertebral anchor.
28. The apparatus of claim 27, wherein said compression member is a set screw received in an internally threaded opening in said bolt, said set screw substantially  
25 aligned with said third axis.
29. The apparatus of claim 23, wherein said clevis engages a non-threaded shaft of said vertebral anchor.
30. The apparatus of claim 23, wherein said bolt engages said rod at a first longitudinal position, said vertebral anchor spaced from said first longitudinal  
30 position along the first longitudinal axis.






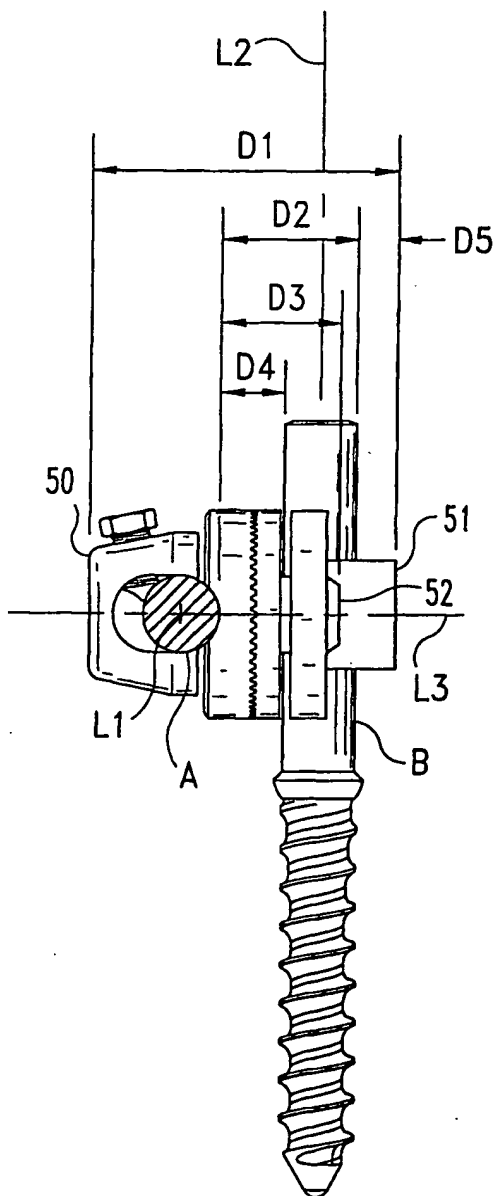


**Fig. 2A**

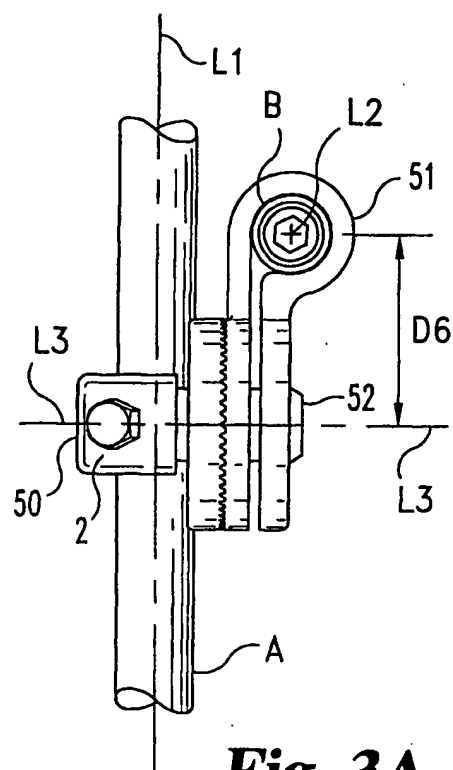


**Fig. 3A**

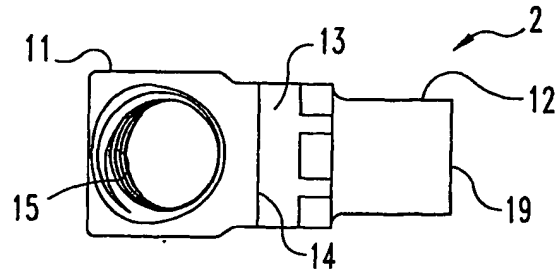


**Fig. 4**

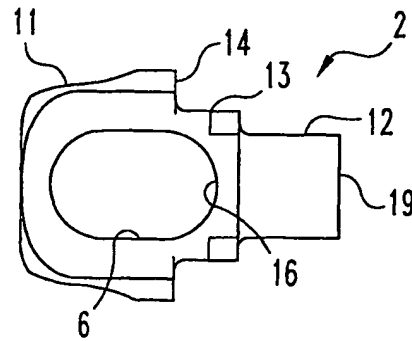


**Fig. 5**




**Fig. 6**

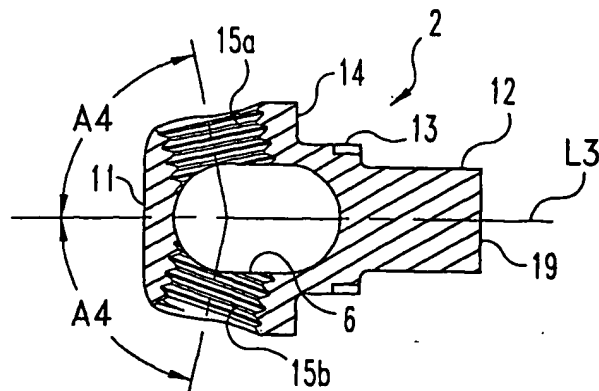


**Fig. 7**

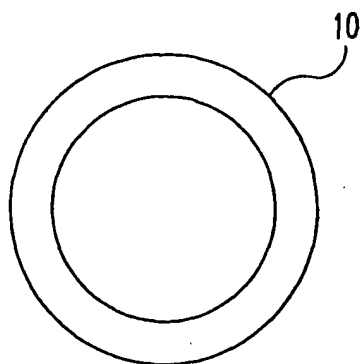


**Fig. 8**




**Fig. 9**

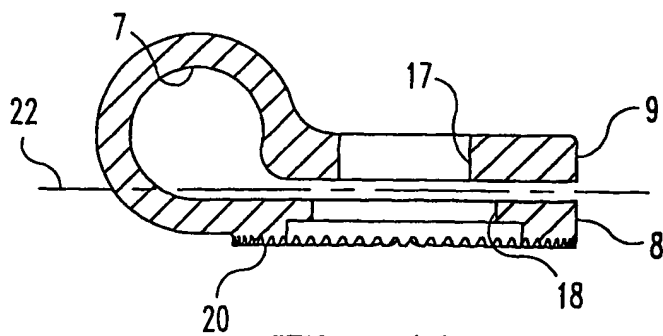



**Fig. 10**

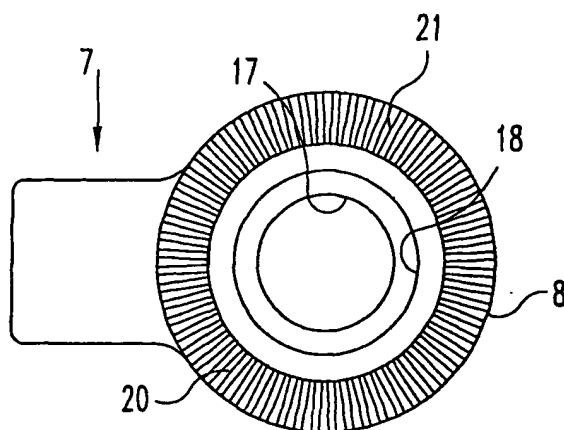


**Fig. 11**

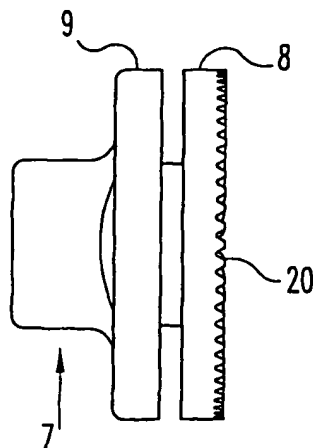


**Fig. 12**

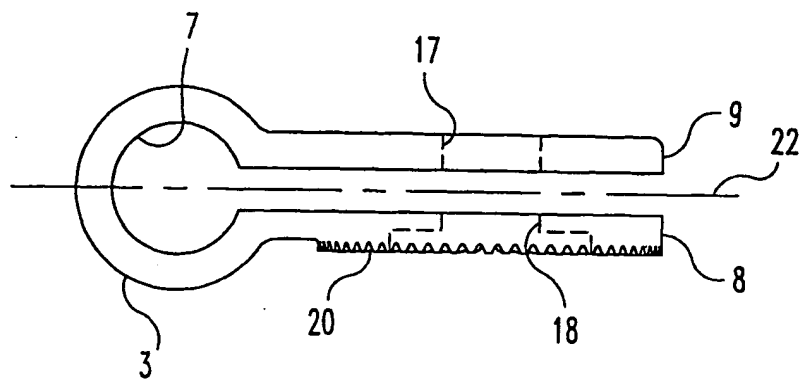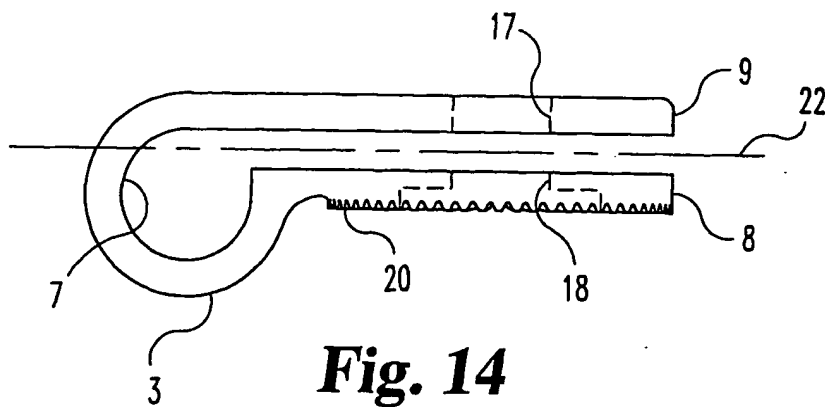
**Fig. 13****Fig. 14**

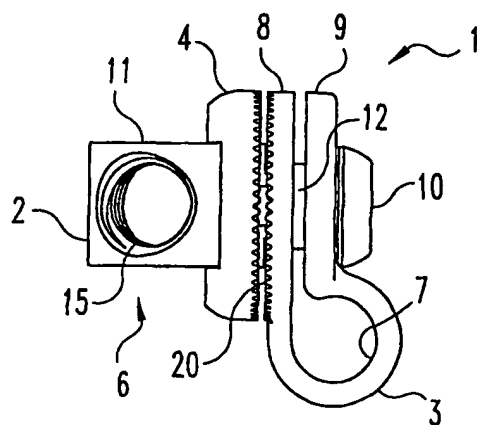




**Fig. 15**

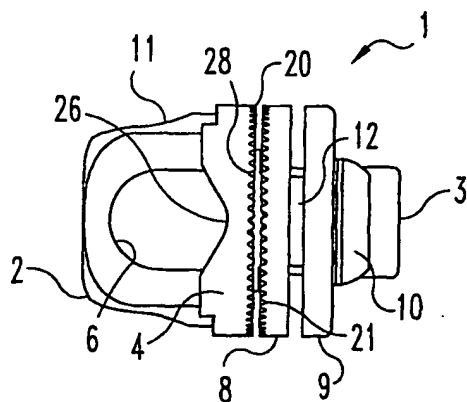

**Fig. 16**

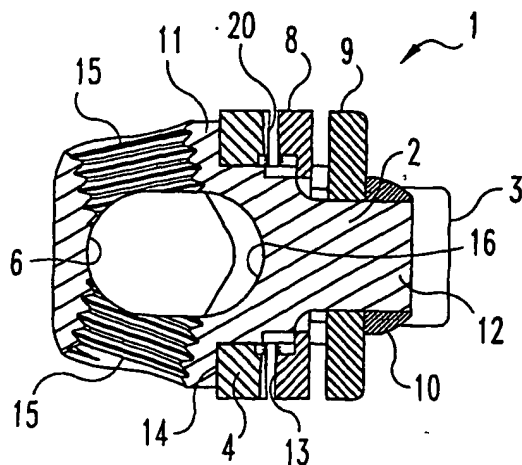

**Fig. 17**

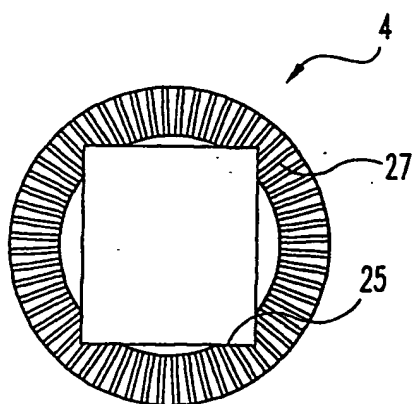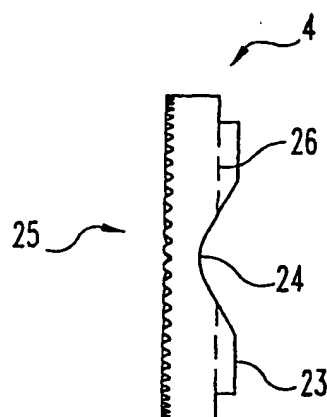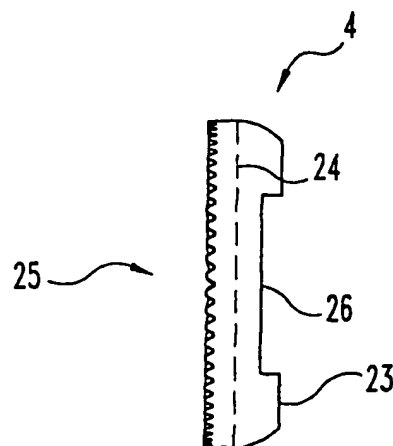**Fig. 18****Fig. 19****Fig. 20**